
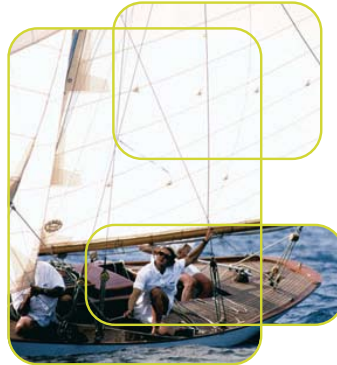


**PLEASURE BOATS**  
**PROFESSIONALS**











DATA  
**N°02**

ATTENTION, products announced by  are subject to legislation and can be applied only by informed professionals.



**APPLICATIONS**

**PRODUCTS**

<ul style="list-style-type: none"> <li>• 2 crossed coats of 35 to 40 dry microns</li> <li>• Theoretical spreading rate : 6 to 8 Sq.m/L for 70 to 80 dry microns (depends on color)</li> </ul>	 <p>GL 55</p>	<p><b>GLYCEROPHTHALIC LACQUER (single component)</b>  D → MONOTOP GL 55  (depends on color card RAL/AFNOR)</p>
<ul style="list-style-type: none"> <li>• 1 to 2 coats of 40 dry microns</li> <li>• Theoretical spreading rate : 10,8 Sq.m/L for 40 dry microns</li> </ul>	<p>GP 46</p>	<p><b>UNIVERSAL PRIMER / UNDERCOAT (single component)</b>  C → GP 46</p>
<p>Practical spreading rate : 1/Sq.m/mm of thickness</p>	<p>COMUSLISS    ULIROC</p>	<p><b>PUTTY FILLER (single component)</b>  B<sup>1</sup> → ULIROC &gt; 1 mm  or  B<sup>2</sup> → COMUSLISS &lt; 1 mm</p>
<ul style="list-style-type: none"> <li>• First coat of 20 dry microns, dilution 20 to 25 %  Theoretical spreading rate : 7,4 to 7,1 Sq.m/L</li> <li>• Second coat of 40 dry microns, dilution 5 à 10 %  Theoretical spreading rate: 8,4 to 8,1 Sq.m/L</li> </ul>	 <p>MP 40</p>	<p><b>ANTICORROSIVE PRIMER WITH RED LEAD (single component)</b>  A → MP 40</p>   <p>T+ - Très toxique</p>
<ul style="list-style-type: none"> <li>• First coat of 20 dry microns, dilution 20 to 25 %  Theoretical spreading rate : 7,4 to 7,1 Sq.m/L</li> <li>• Second coat of 40 dry microns, dilution 5 à 10 %  Theoretical spreading rate: 8,4 to 8,1 Sq.m/L</li> </ul>	 <p>MP 40</p>	<p><b>ANTICORROSIVE PRIMER WITH RED LEAD (single component)</b>  A → MP 40</p>   <p>T+ - Très toxique</p>
<ul style="list-style-type: none"> <li>• 1 to 2 coats of 200 dry microns</li> <li>• Theoretical spreading rate : 3 Sq.m/L for 200 dry microns</li> </ul>	 <p>BT 51</p>	<p><b>UNDERCOAT (single component)</b>  B → MONOTAR BT 51</p>
<ul style="list-style-type: none"> <li>• 1 coat of 75 dry microns</li> <li>• Theoretical spreading rate : 5 Sq.m/L for 75 dry microns</li> </ul>	 <p>MPO 500</p>	<p><b>INTERCOAT VYNILIC PITCH (single component)</b>  C → UNDERCOAT MPO 500</p>
<ul style="list-style-type: none"> <li>• 2 to 3 coats of 75 dry microns</li> <li>• Theoretical spreading rate : 5 Sq.m/L for 75 dry microns</li> </ul>		<p><b>ANTIFOULING</b>  D → GYPTIS : hard matrix antifouling paint  PROTIS : ablative matrix antifouling paint</p>