




YACHTS

DATA
N°24

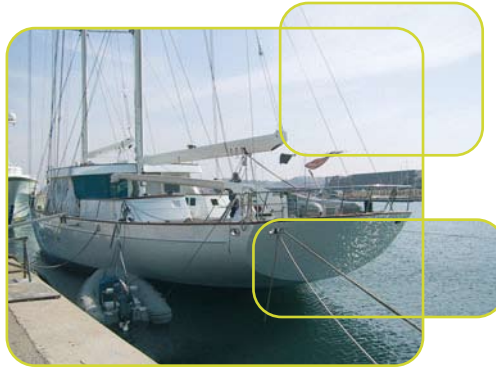

APPLICATIONS

PRODUCTS

<ul style="list-style-type: none"> • 1 coat of 120 dry microns • Theoretical spreading rate : EP 213 HB = 4,8 Sq.m/L for 120 dry microns EP 215 HB = 4,2 Sq.m/L for 120 dry microns 	<p>EP 213 or 215 HB</p>	<p>UNDERCOAT EPOXY PAINT C → UNDERCOAT EP 213 or 215 HB</p>
<ul style="list-style-type: none"> • 1 coat of 60 dry microns • Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns 	<p>EP 211</p>	<p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p>
	<p style="writing-mode: vertical-rl; transform: rotate(180deg);">Below waterline</p>	<p>A → BLASTING TO SWEDISH STANDARD SA 2- 1/2, SA 3</p>
<ul style="list-style-type: none"> • 1 coat of 60 dry microns • Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns 	<p>EP 211</p>	<p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p>
<p>EPOXYGUARD 455 :</p> <ul style="list-style-type: none"> • 1 coat of 300 dry microns • Theoretical spreading rate : 3,3 Sq.m/L for 300 dry microns <p>or</p> <p>AEROXYGLASS 550 OU 560</p> <ul style="list-style-type: none"> • 2 coats of 120 to 130 dry microns • Theoretical spreading rate : 3,7 Sq.m/L for 130 dry microns 	<p>550 or 560</p>	<p>UNDERCOAT EPOXY PAINT C¹ → EPOXYGUARD 455</p> <p>or</p> <p>C² → AEROXYGLASS 550 or 560</p>

* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL