


YACHTS

PROFESSIONAL

ATTENTION, products announced by are subject to legislation and can be applied only by informed professionals.

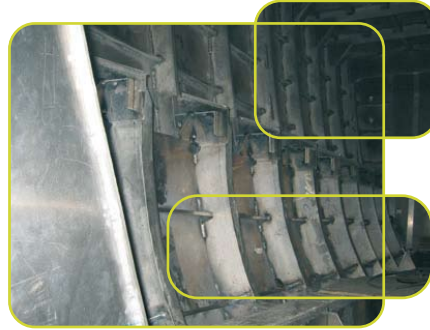

DATA  
 N°32

APPLICATIONS

PRODUCTS

<ul style="list-style-type: none"> <li>• 1 coat of 100 dry microns</li> <li>• Theoretical spreading rate : EP 213 HB = 5,7 Sq.m/L for 100 dry microns EP 215 HB = 5 Sq.m/L for 100 dry microns</li> </ul>	<p>EP 213 or 215 HB</p>	<p>UNDERCOAT EPOXY PAINT          D → UNDERCOAT EP 213 or 215 HB</p>
<ul style="list-style-type: none"> <li>• 1 coat of 30 to 40 dry microns</li> <li>• Theoretical spreading rate : 8,5 Sq.m/L for 40 dry microns</li> </ul>	<p>EP 140</p>	<p>ANTICORROSIVE PRIMER WITH CHROMAT          C → AEROPRIM EP 140  </p>
<ul style="list-style-type: none"> <li>• 1 coat of 5 to 10 dry microns</li> <li>• Theoretical spreading rate : 6,2 Sq.m/L for 10 dry microns</li> </ul>	<p>WP 110</p>	<p>ANTICORROSIVE WHASH PRIMER WITH CHROMAT          B → WASH PRIMER 110  </p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>	<p>Above waterline</p>	<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>	<p>Below waterline</p>	<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>
<ul style="list-style-type: none"> <li>• 1 coat of 5 to 10 dry microns</li> <li>• Theoretical spreading rate : 6,2 Sq.m/L for 10 dry microns</li> </ul>	<p>WP 110</p>	<p>ANTICORROSIVE WHASH PRIMER WITH CHROMAT          B → WASH PRIMER 110  </p>
<ul style="list-style-type: none"> <li>• 1 coat of 30 to 40 dry microns</li> <li>• Theoretical spreading rate : 8,5 Sq.m/L for 40 dry microns</li> </ul>	<p>EP 140</p>	<p>ANTICORROSIVE WHASH PRIMER WITH CHROMAT          C → AEROPRIM EP 140  </p>
<ul style="list-style-type: none"> <li>• 1 coat of 100 to 120 dry microns</li> <li>• Theoretical spreading rate : 4 Sq.m/L for 120 dry microns</li> </ul>	<p>550 or 560</p>	<p>FINISHING EPOXY GLOSS          D → AEROXYGLASS 550 or 560</p>

\* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL