




YACHTS

DATA
N°33

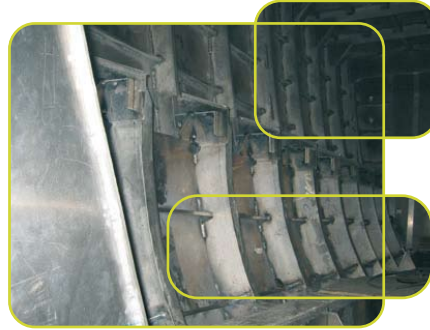

APPLICATIONS

PRODUCTS

<ul style="list-style-type: none"> • 1 coat of 100 dry microns • Theoretical spreading rate : EP 213 HB = 5,7 Sq.m/L for 100 dry microns EP 215 HB = 5 Sq.m/L for 100 dry microns 	<p>EP 213 or 215 HB</p>	<p>UNDERCOAT EPOXY PAINT C → UNDERCOAT EP 213 or 215 HB</p>
<ul style="list-style-type: none"> • 1 coat of 50 to 60 dry microns • Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns 	<p>EP 211</p>	<p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>	<p style="writing-mode: vertical-rl; transform: rotate(180deg);">Below waterline</p>	<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>	<p style="writing-mode: vertical-rl; transform: rotate(180deg);">Above waterline</p>	<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>
<ul style="list-style-type: none"> • 1 coat of 50 to 60 dry microns • Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns 	<p>EP 211</p>	<p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p>
<ul style="list-style-type: none"> • 1 coat of 100 dry microns • Theoretical spreading rate : 4,8 Sq.m/L for 100 dry microns 	<p>550 or 560</p>	<p>FINISHING EPOXY GLOSS C → AEROXYGLASS 550 or 560</p>

* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL