




PLEASURE BOATS
RACING

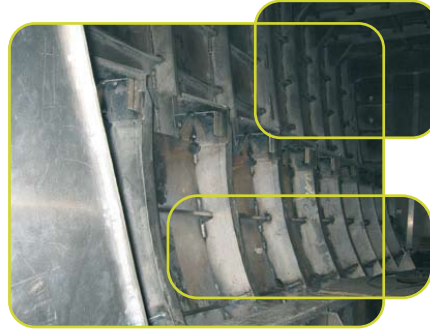

APPLICATIONS

PRODUCTS

<ul style="list-style-type: none"> • 1 coat of 40 to 60 dry microns • Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns 	<p style="text-align: right;">EP 211</p>	<p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>		<p>A → METAL CLEANER or BLASTING SA 2- 1/2,SA 3</p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>		<p>A → METAL CLEANER or BLASTING SA 2- 1/2,SA 3</p>
<ul style="list-style-type: none"> • 1 coat of 40 to 60 dry microns • Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns 	<p style="text-align: right;">EP 211</p>	<p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p>
<ul style="list-style-type: none"> • 1 coat of 100 dry microns • Theoretical spreading rate : 4,8 Sq.m/L for 100 dry microns 	<p style="text-align: right;">550 or 560</p>	<p>FINISHING EPOXY GLOSS C → AEROXYGLASS 550 or 560</p>

Below waterline

Above waterline

* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL