




PLEASURE BOATS
PROFESSIONAL

DATA
N°38

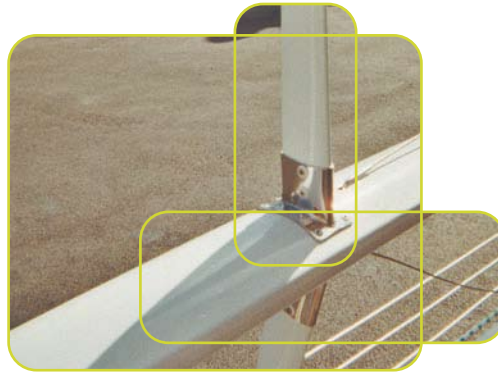

APPLICATIONS

PRODUCTS

PU 320 or PU 99 or PU 77

- 2 to 3 crossed coats of 40 dry microns
- Theoretical spreading rate :
PU 320 = 4,6 Sq.m/L for 80 dry microns (depends on color)
PU 99 = 6,6 Sq.m/L for 80 dry microns (depends on color)
PU 77 = 6,5 Sq.m/L for 80 dry microns (depends on color)

FLEXIBLE POLYURETHANE ACRYLIC LACQUER

E¹ → TOPCOAT COLOR PU 320

or

POLYESTER-POLYURETHANE LACQUER

E² → POLYTOP PU 99

or

ACRYLIC-POLYURETHANE LACQUER

E³ → POLYTOP PU 77

- 1 coat of 25 dry microns
- Theoretical spreading rate : 20,8 Sq.m/L for 25 dry microns

EPU 221

FLEXIBLE INTERCOAT EPOXY-URETHANE

D → INTERFACE EPU 221

if 213 or 215 coat is ready to receive the lacque

- 1 to 2 coats of 120 dry microns
- Theoretical spreading rate :
EP 213 HB = 4,8 Sq.m/L for 120 dry microns
EP 215 HB = 4,2 Sq.m/L for 120 dry microns

EP 213 or 215 HB

UNDERCOAT EPOXY PAINT

C → UNDERCOAT EP 213 or 215 HB

- 1 coat of 40 to 60 dry microns
- Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns

EP 211

ANTICORROSIVE EPOXY PRIMER

B → EPOXY PRIMER EP 211

Metal cleaner treatment : spraying/rinsing/drying

A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3

Spars

