


RECOMMENDED SYSTEMS

■ ■ ■ ■ ■ ■ ■ ■ ■ ■ STEEL & ALUMINIUM TANKS
■ □ INTERIOR AND EXTERIOR TREATMENT

DRINKING WATER

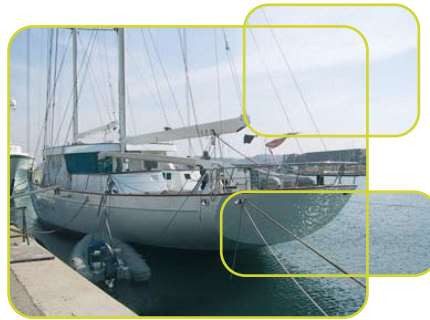

DATA N°48

APPLICATIONS

PRODUCTS

<ul style="list-style-type: none"> • minimum 2 coats of 300 dry microns → (3 coats recommended) • Theoretical spreading rate : 3,3 Sq.m/L for 300 dry microns 	BIOTANK	<p>FREE SOLENT EPOXY ALIMENTARY FINISHING C → BIOTANK</p> <p>Only roller application</p>
<p>ON STEEL :</p> <ul style="list-style-type: none"> • 1 coat of 60 dry microns • Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns <p>ON ALUMINIUM :</p> <ul style="list-style-type: none"> • 1 coat of 40 dry microns • Theoretical spreading rate : 12,5 Sq.m/L for 40 dry microns 	EP 211	<p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p> <p>Roller or AIRLESS application</p>
ON STEEL		A → BLASTING TO SWEDISH STANDARD SA 2,5/SA 3
<p>ON STEEL :</p> <ul style="list-style-type: none"> • 1 coat of 60 dry microns • Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns <p>ON ALUMINIUM :</p> <ul style="list-style-type: none"> • 1 coat of 40 dry microns • Theoretical spreading rate : 12,5 Sq.m/L for 40 dry microns 	EP 211	<p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p> <p>Roller or AIRLESS application</p>
<ul style="list-style-type: none"> • 1 coat of 100 to 120 dry microns • Theoretical spreading rate : 4,8 Sq.m/L for 120 dry microns 	EP 213 HB	<p>UNDERCOAT EPOXY C → UNDERCOAT EP 213 HB</p> <p>Roller or AIRLESS application</p>
<ul style="list-style-type: none"> • 1 coat of 60 to 70 dry microns • Theoretical spreading rate : 7,4 Sq.m/L for 70 dry microns 	PU 77	<p>POLYURETHANE ACRYLIC LACQUER D → ACRYLTOP PU 77 Color RAL or AFNOR Roller or AIRLESS application</p>

* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL