MAP YACHTING PAINT SYSTEMS

RECOMMENDED SYSTEMS

STEEL & ALUMINIUM TANKS
INTERIOR AND EXTERIOR TREATMENT

WASTE WATER

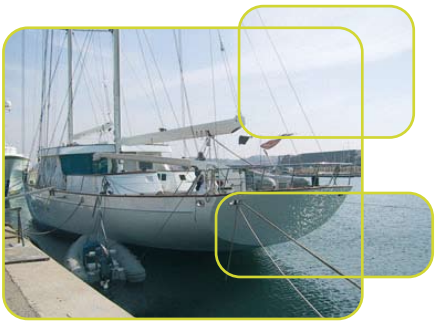

DATA N°49

APPLICATIONS		PRODUCTS
• minimum 2 coats of 300 dry microns → (3 coats recommended) • Theoritical spreading rate : 3,2 Sq.m/L for 300 dry microns	455	EPOXY FINISHING WITHOUT VOLATILE ELEMENT C → EPOXYGUARD 455 Roller or AIRLESS application
ON STEEL : • 1 coat of 60 dry microns • Theoritical spreading rate : 8,3 Sq.m/L for 60 dry microns ON ALUMINIUM : • 1 coat of 40 dry microns • Theoritical spreading rate : 12,5 Sq.m/L for 40 dry microns	EP 211	ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211 Roller or AIRLESS application
ON STEEL		A → BLASTING TO SWEDISH STANDARD SA 2,5/SA 3
ON STEEL : • 1 coat of 60 dry microns • Theoritical spreading rate : 8,3 Sq.m/L for 60 dry microns ON ALUMINIUM : • 1 coat of 40 dry microns • Theoritical spreading rate : 12,5 Sq.m/L for 40 dry microns	EP 211	ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211 Roller or AIRLESS application
• 1 coat of 100 to120 dry microns • Theoritical spreading rate : 4,8 Sq.m/L for 120 dry microns	EP 213 HB	UNDERCOAT EPOXY C → UNDERCOAT EP 213 HB Roller or AIRLESS application
• 1 coat of 60 to 70 dry microns • Theoritical spreading rate : 7,4 Sq.m/L for 70 dry microns	PU 77	POLYURETHANE ACRYLIC LACQUER D → ACRYLTOP PU 77 Color RAL or AFNOR Roller or AIRLESS application

Interior

Exterior

* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL