

RECOMMENDED SYSTEMS




STEEL HULL

EXTERIOR TREATMENT

PLEASURE BOATS

WITH FILLER

CLASSIC SYSTEMS

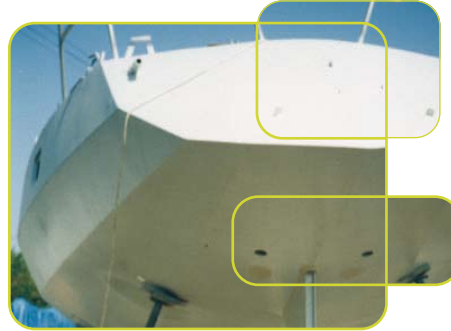

DATA N°20

APPLICATIONS

PRODUCTS

| | | |
|--|---------------------------------|--|
| <p>PU 320 or PU 99 or PU 77</p> <ul style="list-style-type: none"> • 2 to 3 crossed coats of 40 dry microns • Theoretical spreading rate : PU 320 = 4,6 Sq.m/L for 80 dry microns (depends on color) PU 99 = 6,6 Sq.m/L for 80 dry microns (depends on color) PU 77 = 6,5 Sq.m/L for 80 dry microns (depends on color) | <p>PU 320 or PU 99 or PU 77</p> | <p>FLEXIBLE POLYURETHANE ACRYLIC LACQUER F¹ → TOPCOAT COLOR PU 320 or POLYESTER-POLYURETHANE LACQUER F² → POLYTOP PU 99 or ACRYLIC-POLYURETHANE LACQUER F³ → POLYTOP PU 77</p> |
| <ul style="list-style-type: none"> • 1 coat of 25 to 35 dry microns • Theoretical spreading rate : 14,9 Sq.m/L for 35 dry microns | <p>EPU 221</p> | <p>FLEXIBLE INTERCOAT EPOXY-URETHANE E → INTERFACE EPU 221</p> |
| <ul style="list-style-type: none"> • 2 coats of 120 dry microns • Theoretical spreading rate : EP 213 HB = 4,8 Sq.m/L for 120 dry microns EP 215 HB = 4,2 Sq.m/L for 120 dry microns | <p>EP 213 or 215 HB</p> | <p>UNDERCOAT EPOXY PAINT D → UNDERCOAT EP 213 or 215 HB</p> |
| <p>Practical spreading rate : 1l/Sq.m/mm of thickness</p> | <p>100 300</p> | <p>SOLVENT FREE EPOXY FILLER C → MIX FILL 100 and/or MIX FILL 300</p> |
| <ul style="list-style-type: none"> • 1 coat of 60 to 80 dry microns • Theoretical spreading rate : 6,3 Sq.m/L for 80 dry microns | <p>EP 211</p> | <p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211 A → BLASTING TO SWEDISH STANDARD SA 2- 1/2, SA 3</p> |
| <p></p> | <p></p> | <p>A → BLASTING TO SWEDISH STANDARD SA 2- 1/2, SA 3</p> |
| <ul style="list-style-type: none"> • 1 coat of 60 to 80 dry microns • Theoretical spreading rate : 6,3 Sq.m/L for 80 dry microns | <p>EP 211</p> | <p>ANTICORROSIVE EPOXY PRIMER B → EPOXY PRIMER EP 211</p> |
| <ul style="list-style-type: none"> • 3 to 4 coats of 120 to 130 dry microns • Theoretical spreading rate : EP 213 HB = 4,4 Sq.m/L for 130 dry microns EP 215 HB = 3,8 Sq.m/L for 130 dry microns | <p>EP 213 or 215 HB</p> | <p>UNDERCOAT EPOXY PAINT C → UNDERCOAT EP 213 or 215 HB</p> |
| <ul style="list-style-type: none"> • 1 coat of 75 dry microns • Theoretical spreading rate : 5 Sq.m/L for 75 dry microns | <p>MPO 500</p> | <p>INTERCOAT VYNILIC PITCH (single component) D → UNDERCOAT MPO 500</p> |
| <ul style="list-style-type: none"> • 2 to 3 coats of 75 dry microns • Theoretical spreading rate : 5 Sq.m/L for 75 dry microns | | <p>ANTIFOULING E → GYPTIS : hard matrix antifouling paint PROTIS : ablative matrix antifouling paint</p> |

* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL